


# INSTALLATION AND SERVICE MANUAL

**LIGMAN**  
NORTH AMERICA


**For Installation of Accessories Odessa 2 Medium LED.  
Model. A80114, A80131, A80231.**

## PRODUCT DRAWING (DIMENSIONS)


Floodlight ( Yoke Mount ) UOD-500011 , UOD-50012

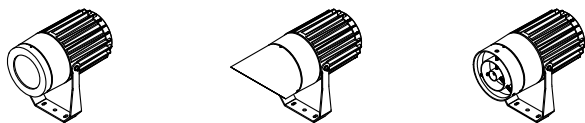

Floodlight ( Pedestal Mount ) UOD-50081 , UOD-50082

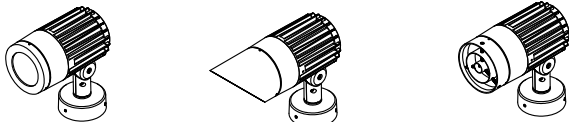

Floodlight ( Threaded Knuckle Mount (TKM)) UOD-50061 , UOD-50062



Linear spread lens  
A80114


Anti-glare attachment  
A80131

Anti-glare louvre  
A80231

## SUITABLE FOR WET LOCATIONS


Unscrew 3 Screws  
Holding Front Bezel  
to Fixture Housing

①

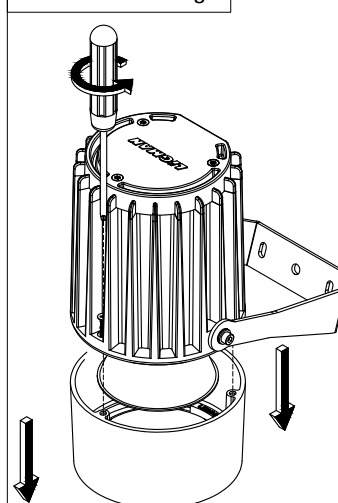


Remove Old Bezel

Replace with New Bezel  
designed for Accessories ②

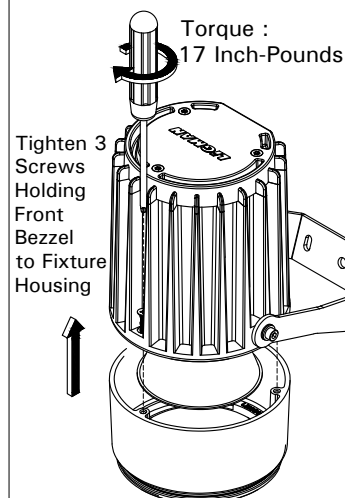


Ensure gasket is Properly Seated  
between bezel and Fixture Housing

Torque :17 Inch-Pounds

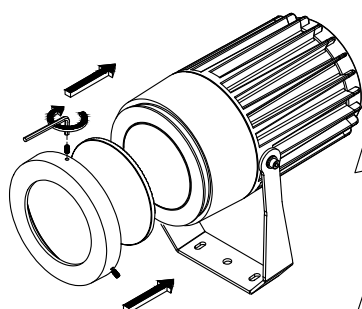


Linear spread lens

Torque :17 Inch-Pounds

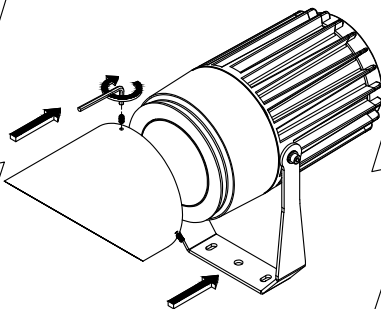

Anti-glare attachment

Torque :17 Inch-Pounds

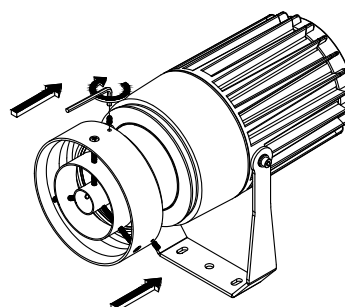


Anti-glare louvre

③

Slide Accessory  
Option into  
New Front  
Bezel

Tighten the 3 set  
Screws on  
Accessory  
Bezel

Torque :17 Inch-Pounds

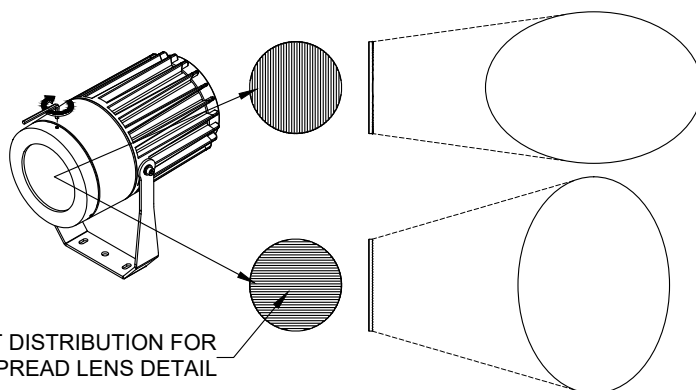

LIGHT DISTRIBUTION FOR  
LINEAR SPREAD LENS DETAIL

④

## Notice to installer :

**1.WIRING INSTRUCTIONS Warning : RISK OF FIRE AND ELECTRICAL SHOCK. : FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY>FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL CODE SPECIFICATIONS. DISCONNECT POWER BEFORE SERVICING.**

**Ligman Lighting USA**

7144 NE Progress Court, Hillsboro  
Oregon, 97124, USA  
Tel : 503 645 0500 | Fax : 503 645 8100

www.ligmanlightingusa.com

A80114 06/05/25 REV.1  
1/1

FM-TS-13-2/21-03-2568/Rev.5