


For Installation of Funen 1,2 Underwater projectors, floodlights RGBW.
Model. FUN-50002 and FUN-50012

Product drawing (dimensions)



! For use only when immersed in water

CE IP68 IK07 CLASS III Q0.3m

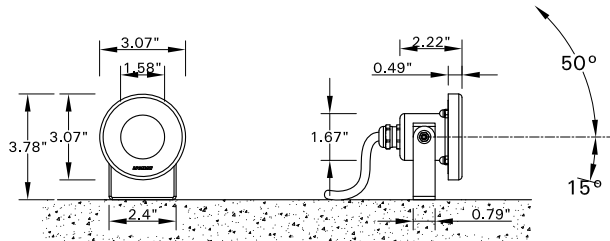


UFUN-50002

MOUNTING DETAIL





TOOL

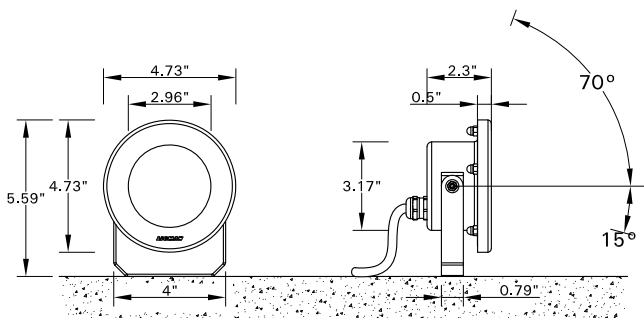


UFUN-50012

MOUNTING DETAIL

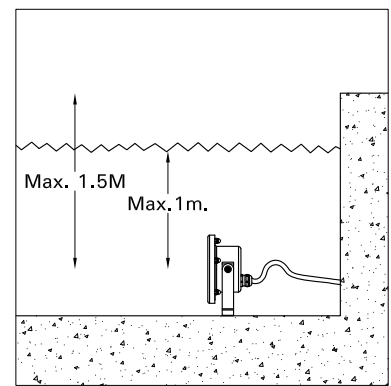


WIRING DIAGRAM LUMINAIRES

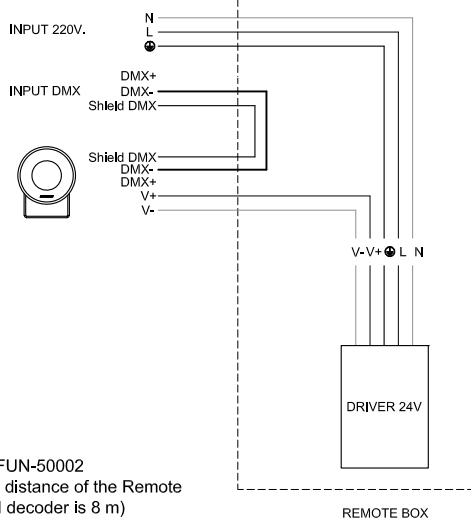

Note : for FUN-50002
(Maximum distance of the Remote
DMX/RDM decoder is 8 m)





REMOTE BOX

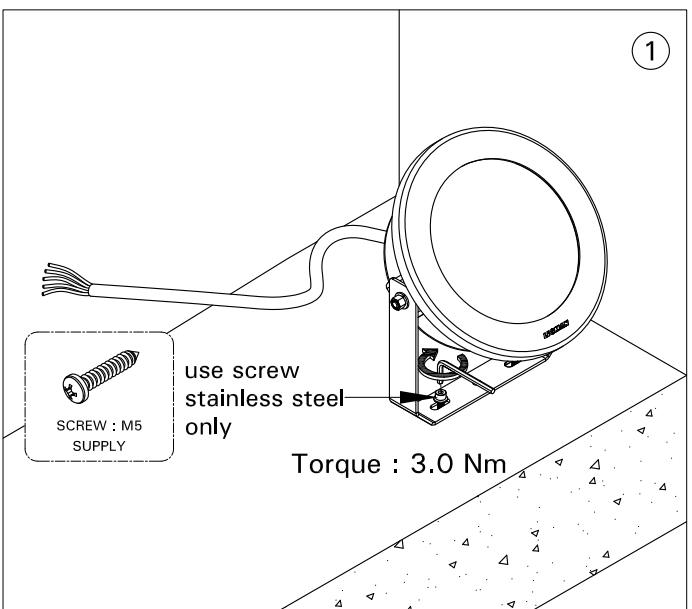

- LIGMAN standard products are supplied with the control gear 24Vdc.
The control gear for other voltages and frequencies is available upon request, please consult us for more details.
- LIGMAN luminaires are designed to conform IEC 60598 2-18 standard.
Technical amendments and modifications techniques reserved.

Ligman Lighting USA

7144 NE Progress Court, Hillsboro
Oregon, 97124, USA
Tel : 503 645 0500 | Fax : 503 645 8100

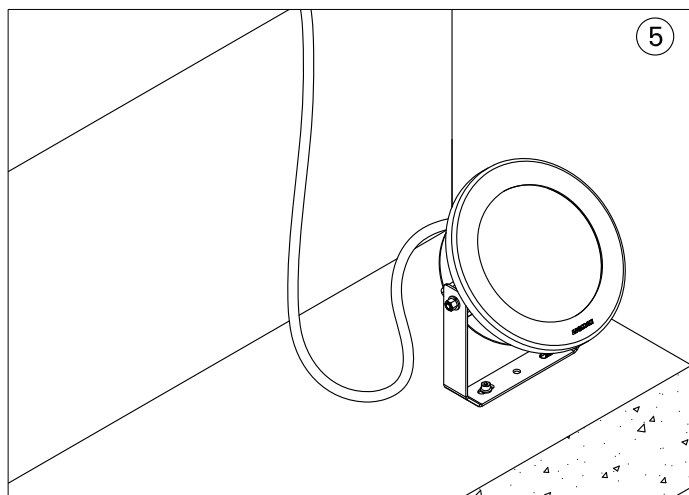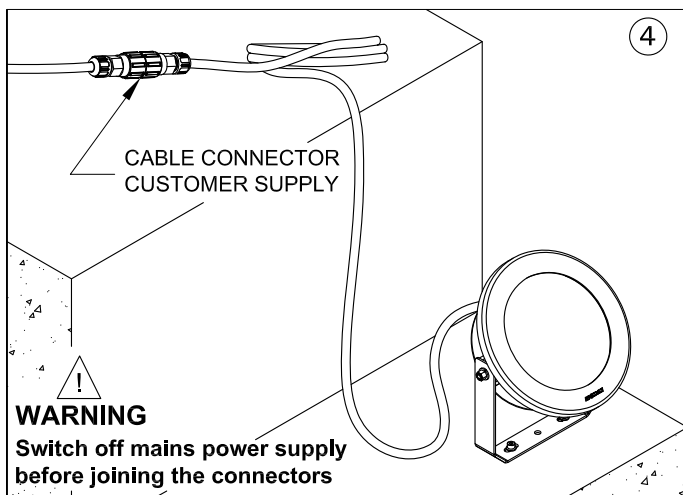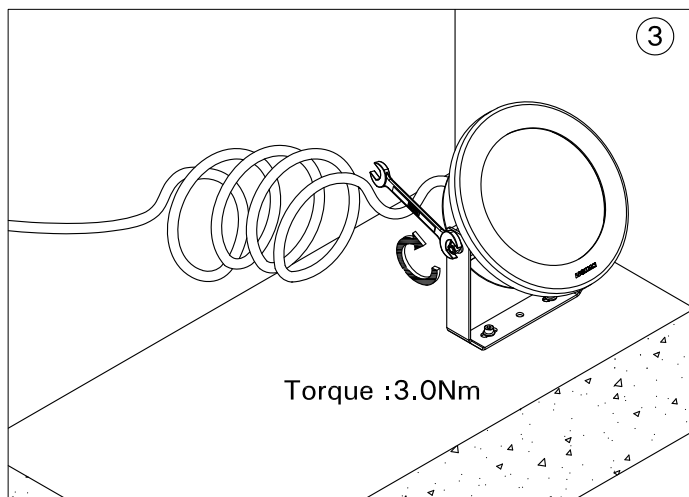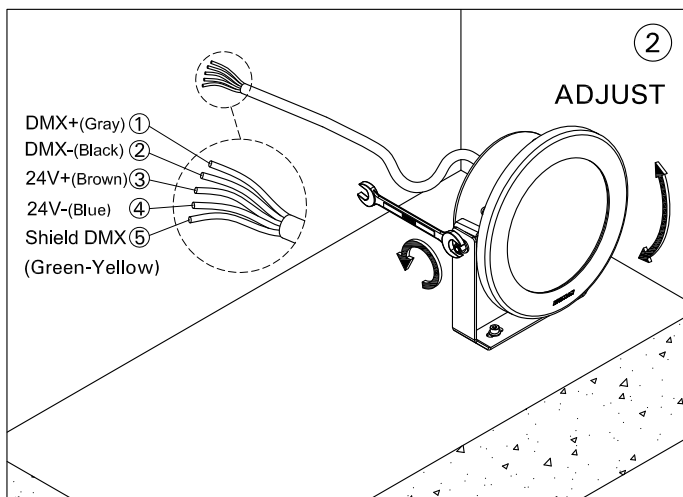

WIRING DIAGRAM RGBW SYSTEM

