


INSTALLATION AND SERVICE MANUAL

LIGMAN
NORTH AMERICA

For Installation of KWH 7,8,9,10,11,12 floodlights, RGBW, RGBTW.

Model. UKWH-50002-3, UKWH-50012-13, UKWH-50022-23, UKWH-50032-33, UKWH-50042-43
and UKWH-50052-53

Product drawing (dimensions) SUITABLE FOR WET LOCATIONS





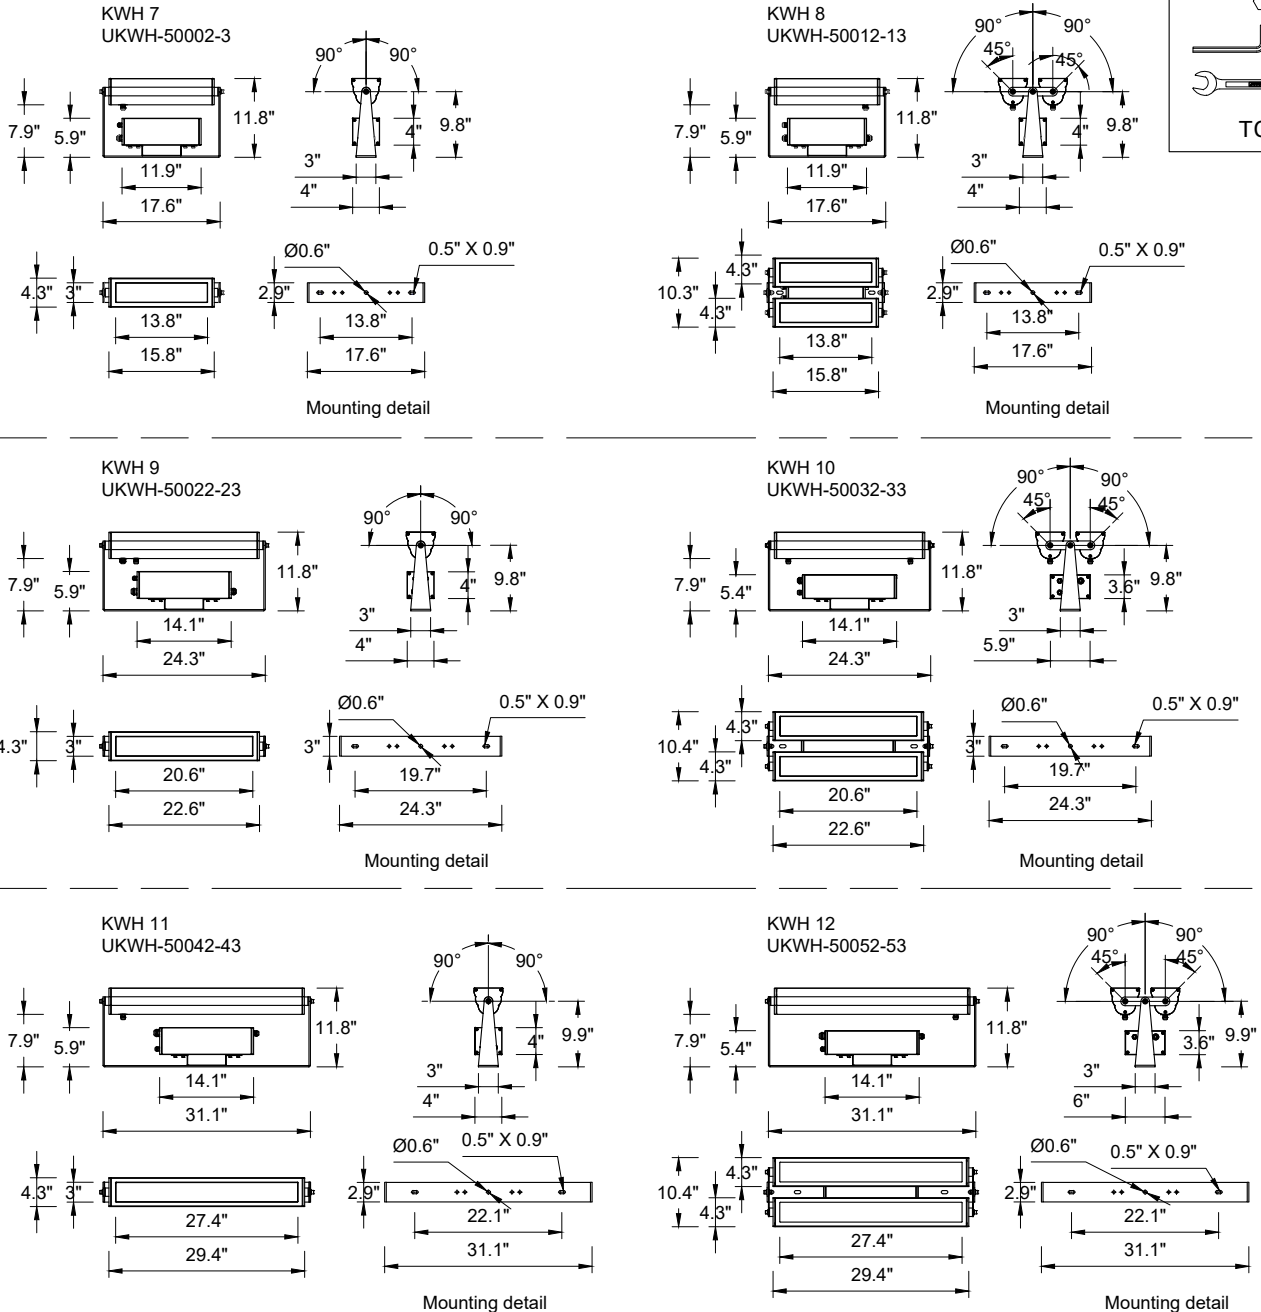


Notice to installer :

- 1.WIRING INSTRUCTIONS Warning : RISK OF FIRE AND ELECTRICAL SHOCK. : FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY>FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL CODE SPECIFICATIONS. DISCONNECT POWER BEFORE SERVICING.**
- 2.This fixture has a VOLTAGE SPECIFIC BALLAST,Check that the supply voltage is the same as the installed ballast voltage.**

Ligman Lighting USA

7144 NE Progress Court, Hillsboro
Oregon, 97124, USA
Tel : 503 645 0500 | Fax : 503 645 8100

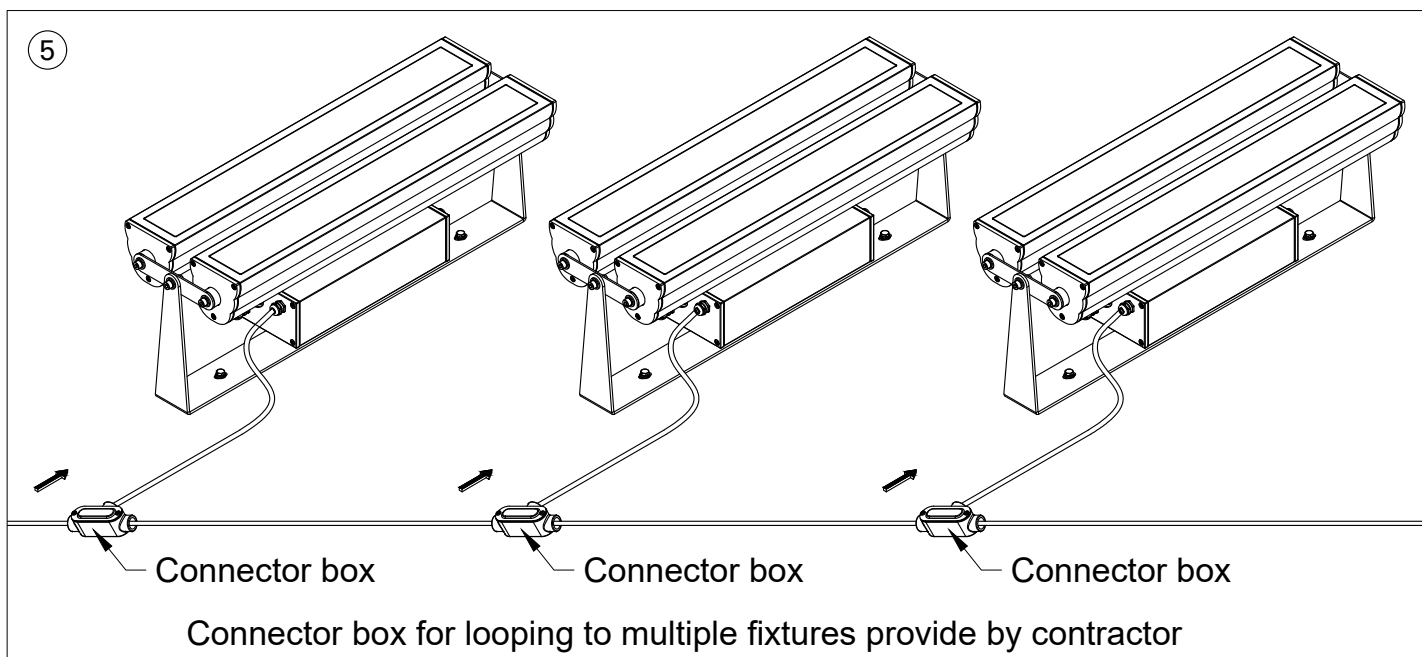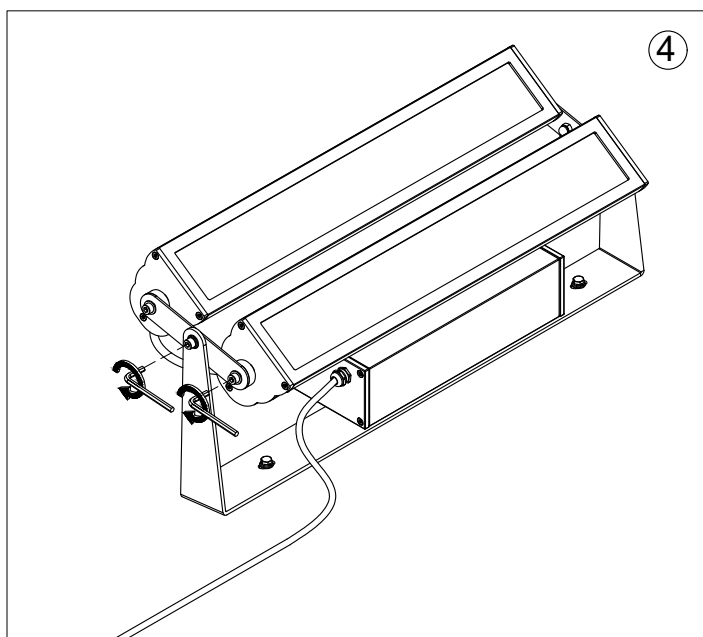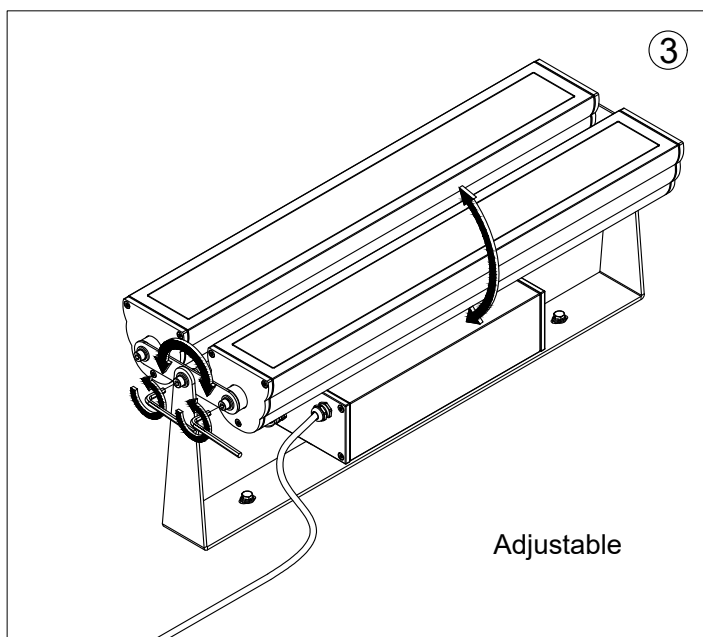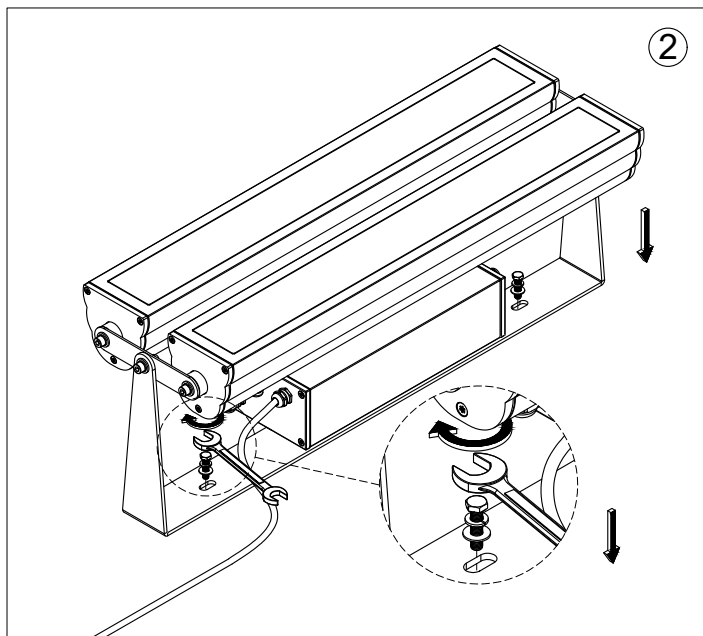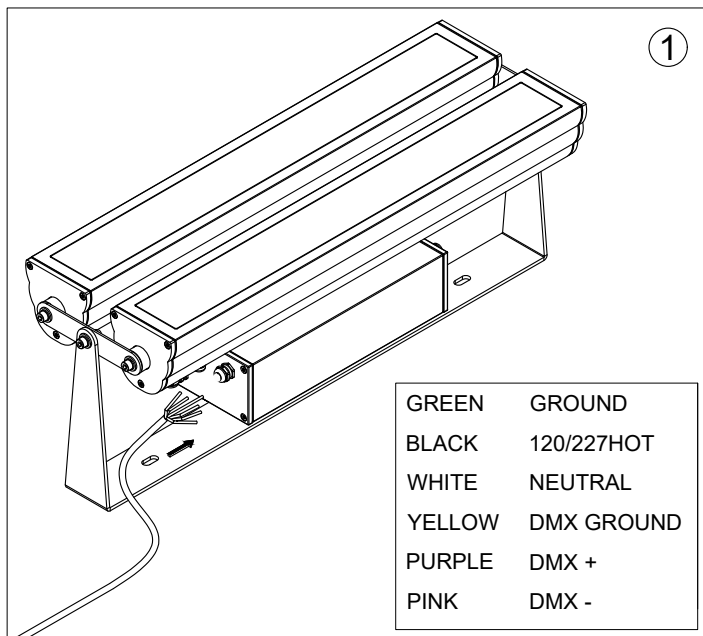


DMX WIRING DIAGRAM



GREEN	GROUND
BLACK	120/277 HOT
WHITE	NEUTRAL
YELLOW	DMX GROUND
PURPLE	DMX +
PINK	DMX -

SINGLE FIXTURE CONNECTION

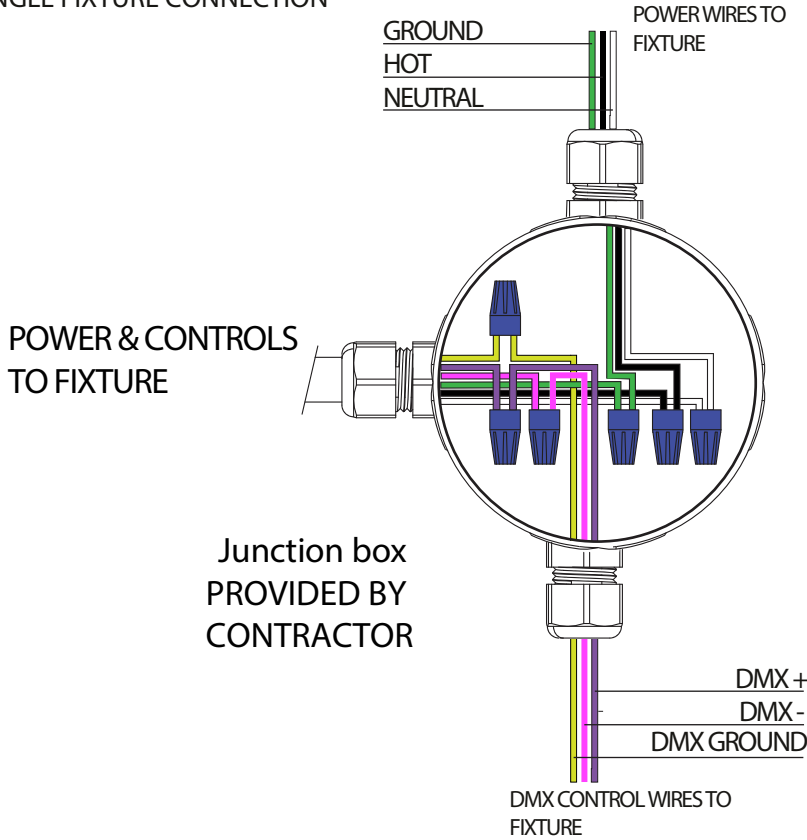

FOR LOOPING TO MULTIPLE FIXTURES

