


INSTALLATION AND SERVICE MANUAL

LIGMAN
NORTH AMERICA


For installation of Mondova recessed exterior downlight
Model. UMO-80001 , UMO-80011 , UMO-80002 and UMO-80012.

Product drawing (dimensions)

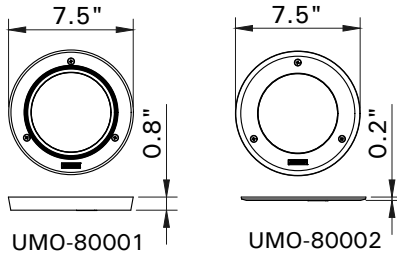


UMO-80001

UMO-80002

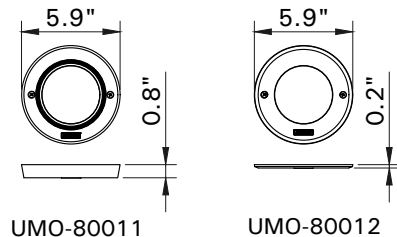

UMO-80011


UMO-80012

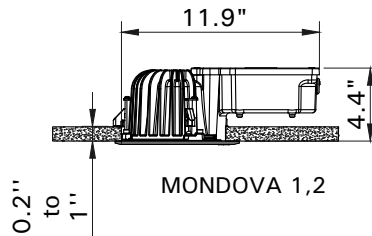

MONDOVA 1,2




MONDOVA 1,2
Ceilling cut hole Ø 6.9"

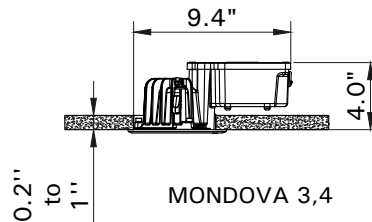


MONDOVA 3,4




MONDOVA 3,4
Ceilling cut hole Ø 5.5"

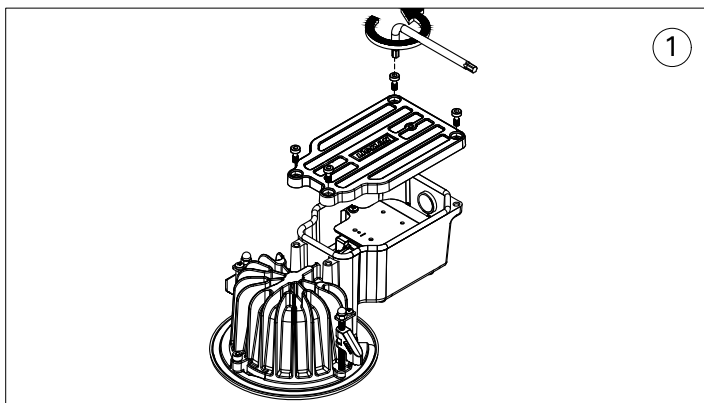


1

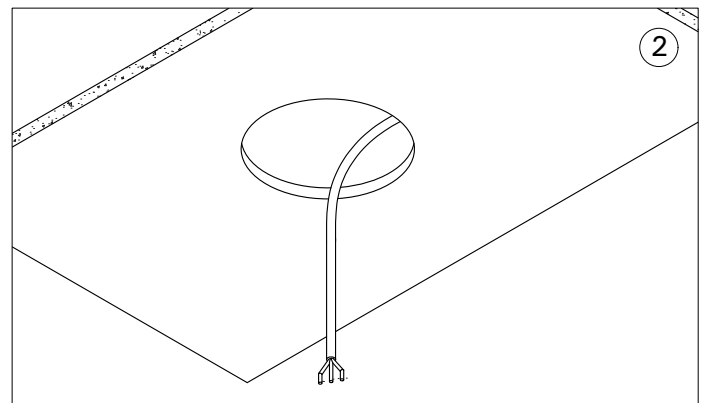

2

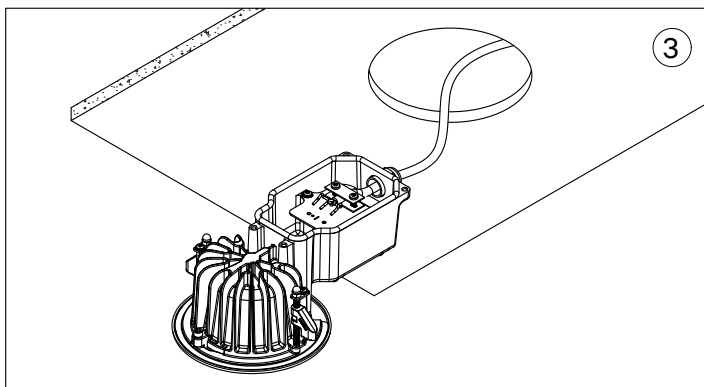

3

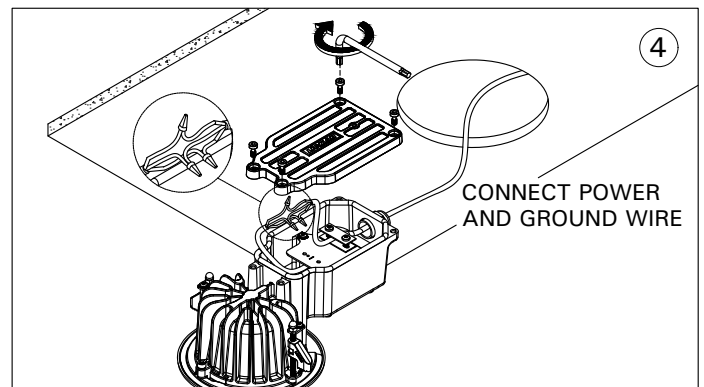

4

CONNECT POWER
AND GROUND WIRE

Notice to installer :

1.WIRING INSTRUCTIONS Warning : RISK OF FIRE AND ELECTRICAL SHOCK. : FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY>FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL CODE SPECIFICATIONS. DISCONNECT POWER BEFORE SERVICING.

2.This fixture has a VOLTAGE SPECIFIC BALLAST,Check that the supply voltage is the same as the installed ballast voltage.

Ligman Lighting USA

7144 NE Progress Court, Hillsboro
Oregon, 97124, USA
Tel : 503 645 0500 | Fax : 503 645 8100

www.ligmanlightingusa.com

UMO-80001 28/02/24/REV.1
1/2

FM-TS-13-1/13-05-2563/Rev.6

